



# R8215 2.4GHz 15dBi Yagi Antenna

Data Sheet 260401

## Main Features


- Radome-enclosed yagi antenna
- Ideal for point-to-point or point-to-multipoint service
- Rugged design
- Supplied with flexible coaxial fly-lead to simplify connection
- Supplied fully assembled
- Includes stainless steel mounting hardware for mast up to 60mm
- Designed & manufactured in Australia
- 24-month warranty



## Electrical Specifications

Frequency	2400 - 2450MHz
Minimum gain	15dBi
Vertical beam-width	29°
Horizontal beam-width	26°
Front-to-back ratio	30dB
Cross-polar rejection	20dB
Return loss	15dB
Impedance	50 Ohms
Maximum power	10 Watts
Polarization	Vertical or horizontal

## Horizontal Radiation Pattern

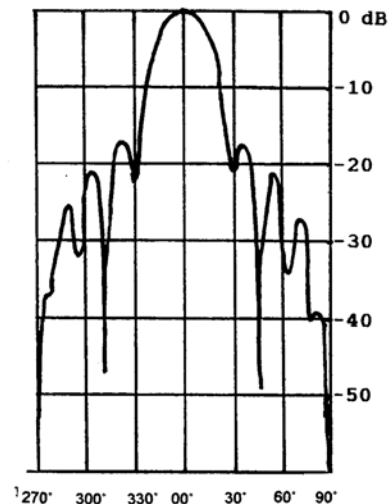

## Mechanical Specifications

Standard connector	N-Male (others available on request)
Fly lead length	300mm
Ground plane area	125mm x 125mm
Radome length	500mm
Elevation adjustment	±30°
Azimuth adjustment	360°
Mass	2kg
Mast diameter	30mm - 60mm
Operating temperature	-20°C to 70°C
Standards compliance	AS1471, MIL-C81706
Wind load at 100kmph	3kg

Pacific Satellite Pty Ltd  
12 George Road, PO Box 100  
Salamander Bay, NSW 2317  
AUSTRALIA

antennas that go the distance



National Sales: 1800 001 081  
Phone: 61 2 4982 0855  
Fax: 61 2 4982 0566  
[www.pacsat.com.au](http://www.pacsat.com.au)  
[sales@pacsat.com.au](mailto:sales@pacsat.com.au)