



# GA2424 2.4GHz 24dBi Grid Antenna

Data Sheet 100513

## Main Features

### GA2424

- Simple to install and aim
- Low mast and wind loading
- Corrosion resistant cast aluminium alloy grid reflector
- Vented, weatherproof feed housing
- Durable solid brass feed
- Good multi-path interference rejection
- Excellent front to back ratio
- Supplied with mounting hardware for attaching to mast or tower member
- 24-month warranty

### GA2424F

- Foam-filled feed for arduous conditions
- Stainless steel/aluminium mounting hardware





## Electrical Specifications

Frequency	2400 - 2500MHz
Minimum gain	24dBi
Vertical beam-width	16°
Horizontal beam-width	10°
Front-to-back ratio	30dB
Impedance	50 Ohms
Maximum power	10 Watts
Polarization	Vertical or horizontal
VSWR	<1:1.5

## Mechanical Specifications

Standard connector	N-Male
(others available on request)	
Cable tail	500mm
Reflector aperture	900mm x 600mm
Elevation range	25°
Azimuth range	360°
Mass	3kg
Mast diameter	30mm - 60mm
Operating temperature	-20°C to 70°C
Standards compliance	AS1471 & MIL-C81706
Wind load at 100kmph	20kg

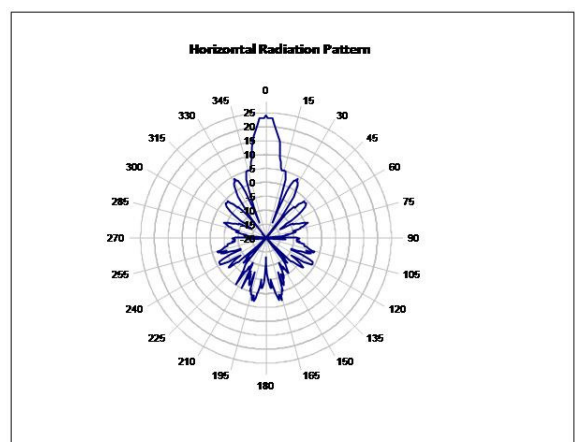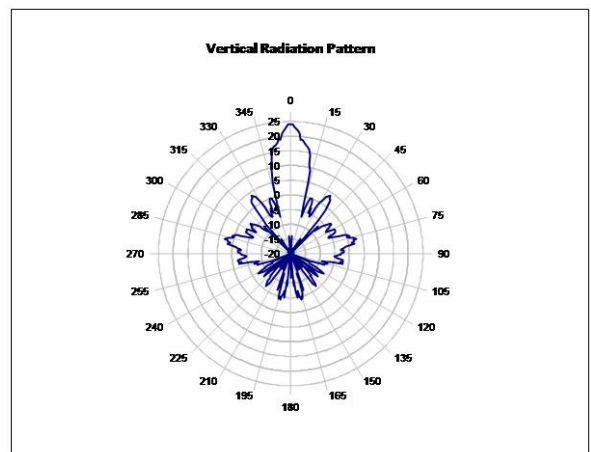

Pacific Satellite Pty Ltd  
12 George Road, PO Box 100  
Salamander Bay, NSW 2317  
AUSTRALIA

antennas that go the distance

National Sales: 1800 001 081  
Phone: 61 2 4982 0855  
Fax: 61 2 4982 0566  
[www.pacsat.com.au](http://www.pacsat.com.au)  
[sales@pacsat.com.au](mailto:sales@pacsat.com.au)