



# OMN5410 5GHz 10dBi Omni Antenna

Data Sheet 260401

## Main Features


- Omni-directional base station antenna
- Co-linear antenna with excellent horizontal circularity to ensure null-free coverage
- Ideally suited for use with bi-directional amplifiers to achieve maximum EIRP levels
- Rugged aluminium and fiberglass construction
- Vertically polarised
- Stainless steel/aluminium mounting hardware included
- Designed and manufactured in Australia



## Electrical Specifications

Frequency	5460 - 5875MHz
Antenna type	Collinear
Minimum gain	10dBi
Electronic beam-tilt	-1°
Vertical beam-width	8°
Horizontal beam-width	360° ± 0.5dB
Min Return loss	-16dB
Impedance	50 Ohms
Maximum power	50 Watts
Standard polarization	Vertical

## Typical Radiation Pattern

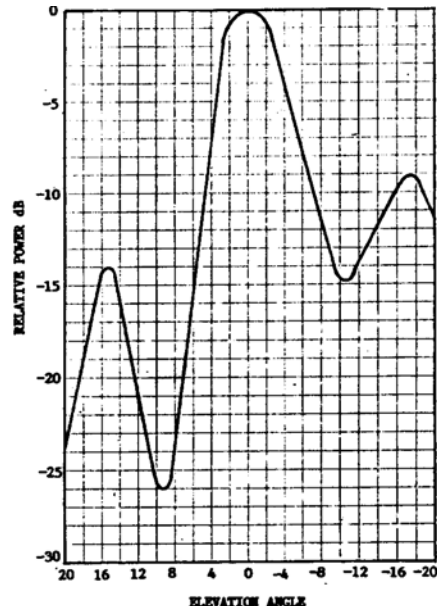

## Mechanical Specifications

Standard connector	N-Female
Mass	0.8kg
Length	500mm
Radome diameter	35mm
Mast diameter	30mm - 60mm
Survival wind rating	220kmph
Wind loading	4kg at 200kmph
Operating temperature	-20°C to 70°C
Standards compliance	AS1471

Pacific Satellite Pty Ltd  
12 George Road, PO Box 100  
Salamander Bay, NSW 2317  
AUSTRALIA



National Sales: 1800 001 081  
Phone: 61 2 4982 0855  
Fax: 61 2 4982 0566  
[www.pacsat.com.au](http://www.pacsat.com.au)  
[sales@pacsat.com.au](mailto:sales@pacsat.com.au)