



P5428 5GHz 28dBi Patch Antenna

Data Sheet 071405

Main Features

- Low profile and unobtrusive appearance
- Wide operating bandwidth
- Low side and back lobes
- Easy to install
- Minimal depth
- Suitable for indoor and outdoor use
- Supplied with mounting bracket
- US Manufacture




Electrical Specifications

Frequency	5150 MHz – 5850 MHz
Minimum gain	28dBi
Vertical beam-width	4.5°
Horizontal beam-width	4.5°
VSWR	<1.5:1
Sidelobes	<-11dB
Front-to-back ratio	>-36dB
Cross-polar rejection	>-28dB
Impedance	50 Ohms
Polarisation	Vertical/Horizontal
Power	6 Watt


Mechanical Specifications

Standard connector	N-Female
Dimensions	600mm x 600mm
Depth	55mm
Elevation adjustment	±10°
Azimuth adjustment	±360°
Radome material	White plastic
Lightning protection	DC grounded
Base plate	Aluminium
Weight	8.6Kg
Operating temperature	-40°C to 65°C
Survival wind speed	200kmph

Azimuth Radiation Pattern

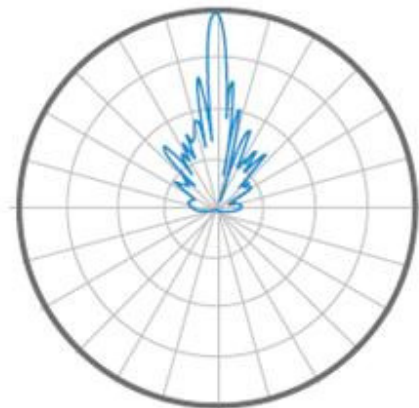

Elevation Radiation Pattern

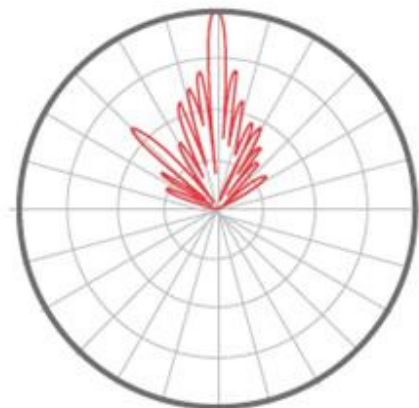

Pacific Satellite Pty Ltd
12 George Road, PO Box 100
Salamander Bay, NSW 2317
AUSTRALIA

antennas that go the distance



National Sales: 1800 001 081
Phone: 61 2 4982 0855
Fax: 61 2 4982 0566
www.pacsat.com.au
sales@pacsat.com.au