



R8215 2.4GHz 15dBi Yagi Antenna

Data Sheet 260401

Main Features


- Radome-enclosed yagi antenna
- Ideal for point-to-point or point-to-multipoint service
- Rugged design
- Supplied with flexible coaxial fly-lead to simplify connection
- Supplied fully assembled
- Includes stainless steel mounting hardware for mast up to 60mm
- Designed & manufactured in Australia
- 24-month warranty



Electrical Specifications

Frequency	2400 - 2450MHz
Minimum gain	15dBi
Vertical beam-width	29°
Horizontal beam-width	26°
Front-to-back ratio	30dB
Cross-polar rejection	20dB
Return loss	15dB
Impedance	50 Ohms
Maximum power	10 Watts
Polarization	Vertical or horizontal

Horizontal Radiation Pattern

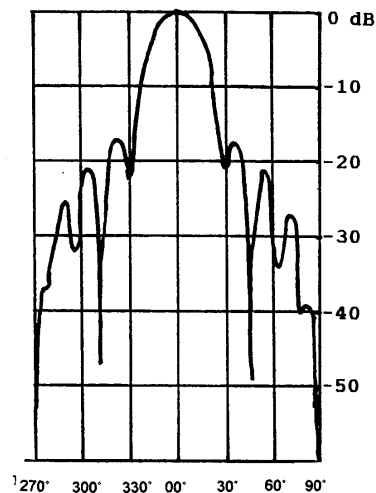

Mechanical Specifications

Standard connector	N-Male (others available on request)
Fly lead length	300mm
Ground plane area	125mm x 125mm
Radome length	500mm
Elevation adjustment	±30°
Azimuth adjustment	360°
Mass	2kg
Mast diameter	30mm - 60mm
Operating temperature	-20°C to 70°C
Standards compliance	AS1471, MIL-C81706
Wind load at 100kmph	3kg

Pacific Satellite Pty Ltd
12 George Road, PO Box 100
Salamander Bay, NSW 2317
AUSTRALIA

antennas that go the distance



National Sales: 1800 001 081
Phone: 61 2 4982 0855
Fax: 61 2 4982 0566
www.pacsat.com.au
sales@pacsat.com.au